



The range of “BIG RIG” swivels is a further development of the famous Brewis Heavy Duty Swivel.

Each swivel uses an SKF Explorer or FAG X-Life spherical roller thrust bearing of a declared size. i.e. The 154 US Ton swivel contains a bearing with a dynamic capacity of 154 US Tons.

Most swivel makers don't declare the **bearing** capacity of their swivels but instead quote a figure for the strength of the supporting steelwork; this isn't much help if the bearing has seized!

Features –

- ❖ SKF Explorer or FAG X-Life Spherical roller thrust bearing of a declared size and capacity.
- ❖ Patented sealing system proven to keep out bentonite but still allow power greasing.
- ❖ Side access grease point.
- ❖ Made from high tensile alloy steel.
- ❖ Shaft and end cap machined from solid bar to give maximum integrity.
- ❖ Box to clevis, clevis to clevis or custom connections.




Universal joint kit



BigRig™ HDD Swivels


technical specifications

we reserve the right to amend the specifications without notice. E&OE

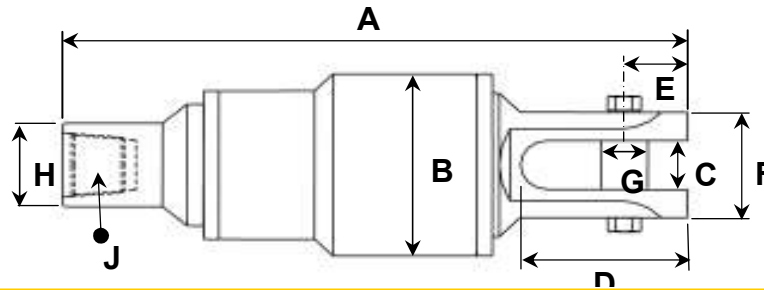

Part No.	Size		A	B	C	D	E	F	G	H	J	Thrust Bearing	Maximum Dynamic kNAUST	Maximum Static kNAUST	Ship Kg
10-044	44	mm	610	165.0	54.0	160.0	62.0	126.0	44.0	120.0	3 1/2" IF	29412	390	915	75kg
		US Tonz	inch	24.02	6.50	2.13	6.30	2.44	4.96	1.73	4.72		44	103	
10-058	58	mm	722	185.0	70.0	197.0	65.0	140.0	54.0	159.0	4 1/2" IF	29414	520	1250	110kg
		US Tonz	inch	28.43	7.28	2.76	7.76	2.56	5.51	2.13	6.26		58	141	
10-083	83	mm	847	225.0	83.0	237.5	91.0	170.0	63.0	159.0	4 1/2" IF	29417	735	1800	160kg
		US Tonz	inch	33.35	8.86	3.27	9.35	3.58	6.69	2.48	6.26		83	202	
10-110	110	mm	899	260.0	83.0	235.0	90.0	170.0	63.0	159.0	4 1/2" IF	29420	980	2500	200kg
		US Tonz	inch	35.39	10.24	3.27	9.25	3.54	6.69	2.48	6.26		110	281	
10-154	154	mm	978	315.0	89.0	262.0	102.0	180.0	75.6	159.0	4 1/2" IF	29424	1370	3450	290kg
		US Tonz	inch	38.50	12.40	3.50	10.31	4.02	7.09	2.98	6.26		154	388	
10-175	175	mm	1038	340.0	89.0	262.0	102.0	180.0	75.6	159.0	4 1/2" IF	29426	1560	4150	360kg
		US Tonz	inch	40.87	13.39	3.50	10.31	4.02	7.09	2.98	6.26		175	467	
10-210	210	mm	1174	380.0	102.0	320.0	120.2	220.0	89.0	178.0	5 1/2" FH	29430	1860	5100	525kg
		US Tonz	inch	46.22	14.96	4.02	12.60	4.73	8.66	3.50	7.01		209	573	
10-265	265	mm	1303	430.0	102.0	321.0	120.0	240.0	89.0	229.0	6 3/8" FH	29434	2360	6550	750kg
		US Tonz	inch	51.30	16.93	4.02	12.64	4.72	9.45	3.50	9.02		265	736	
10-320	320	mm	1424	470.0	127.0	398.0	159.0	280.0	114.0	229.0	6 3/8" FH	29438	2850	8000	1150kg
		US Tonz	inch	56.06	18.50	5.00	15.67	6.26	11.02	4.49	9.02		320	899	
10-382	382	mm	1460	530.0	127.0	398.0	159.0	300.0	114.0	275.0	6 3/8" FH	29448	3400	10200	1380kg
		US Tonz	inch	56.54	20.86	5.00	15.67	6.26	11.81	4.49	8.99		382	1147	
10-455	455	mm	1655	560.0	140.0	455.0	178.0	324.0	140.0	280.0	6 3/8" FH	29452	4050	12900	
		US Tonz	inch	65.16	22.05	5.51	17.91	7.01	12.76	5.51	11.02		455	1450	
10-550	550	mm	1642	600.0	156.0	452.0	190.0	350.0	150.0	280	6 3/8" FH	29456	4900	15300	1710kg
		US Tonz	inch	64.65	23.62	6.14	17.80	7.48	13.78	5.91	11.02		551	1720	

Revised Feb-13

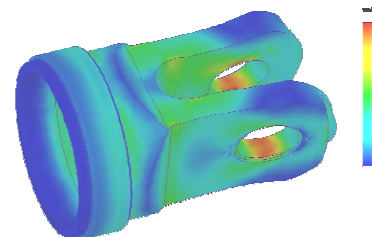

brewisengineering.co.uk

Brewis Engineering Limited Handlemaker Road
 Marston Trading Estate Frome Somerset BA11 4RW
 Tel: +44 (0)1373 468864 Fax: +44 (0)1373 468865
 sales@brewisengineering.co.uk

